



ROCKTOOLS
L+T5
AUSTRALIA

PRODUCT CATALOGUE

Underground Production Drilling

T38

T45

T51



*Committing to a sustainable
mining environment*




ROCKTOOLS
LHS
AUSTRALIA

T38, T45 & T51 Underground Production Drilling



T38, T45 & T51 - Underground Production Drilling

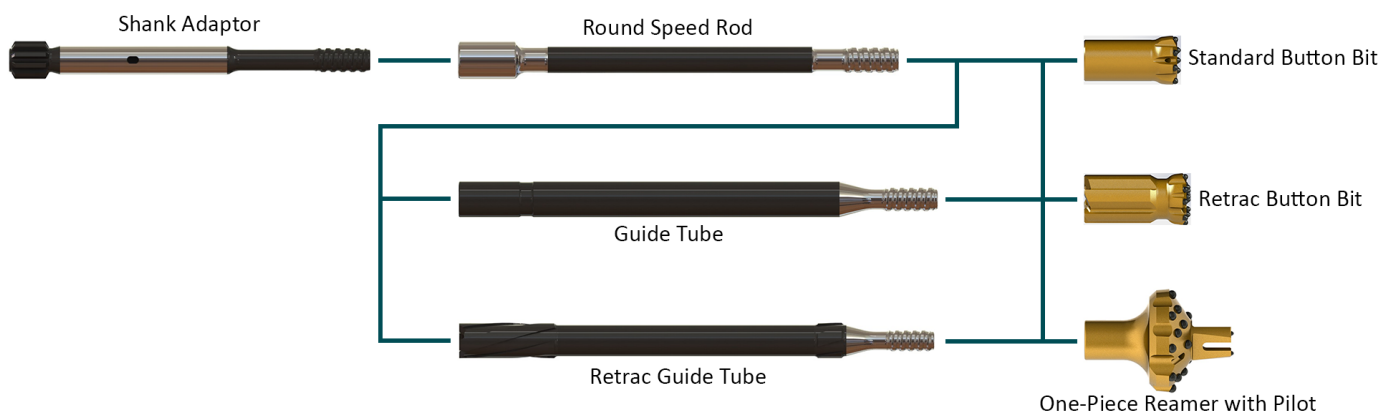




T38 Shank Adaptors

	DRIFTER	LENGTH (mm)	OD (mm)	LHS P/N
Sandvik/Tamrock, T38				
	HL500S HL510S	500	38	QW16-500T38-HK
	HLX5PE	575	45	QW-63-5L-HK
	HL650 HL700 HL710 HL810 HL820	600	52	QW-59-3L-HK
Epiroc/COP, T38				
	COP1440 COP1551 COP1838	525	52	QW-33-5L-HK
	COP1838EX	730	60	QW-55-4L-HK
	COP1838MUX	730	52	QW119-730T38-HK



T38 Rods & Tubes

	LENGTH (mm)	OD (mm)	LHS P/N
Speed Rod, Round, T38 Female – T38 Male			
	1220	38	KYGT38-12L
	1525	38	KYGT38-15L
	1830	38	KYGT38-18L
Guide Tube, T38 Female – T38 Male			
	1525	56	KYG56T38-15L
	1830	56	KYG56T38-18L
Guide Tube, Retractable, T38 Female – T38 Male			
	1830	56	KYG56T38Y-18L




T38 Button Bits

Drill bits are available in spherical, ballistic and semi-ballistic carbide shapes.

	Size (mm)	Buttons * Size (mm)		Flushing		LHS P/N
		Gauge	Face	Side	Face	

8-Gauge Button Bit, Flat Face, Regular Skirt, T38



64	8*10	4*10	2	2	ZQ64F7-T38
76	8*12	4*12	2	2	ZQ76F6-T38
89	8*12	6*12	2	2	ZQ89F3-T38

6-Gauge Button Bit, Drop Centre, Regular Skirt, T38



64	6*10	3*10, 1*9	0	3	ZQA64D3-T38
----	------	-----------	---	---	-------------

8-Gauge Button Bit, Drop Centre, Regular Skirt, T38



64	8*10	4*10, 1*9	0	3	ZQA64F3-T38
76	8*11	4*11, 1*10	0	4	ZQA76F2-T38

8-Gauge Button Bit, Flat Face, Retractable Skirt, T38



64	8*10	4*10	2	2	ZQY64F3-T38
76	8*11	4*11	2	2	ZQY76F5-T38



T38 Button Bits

Drill bits are available in spherical, ballistic and semi-ballistic carbide shapes.

	Size (mm)	Buttons * Size (mm)		Flushing		LHS P/N
		Gauge	Face	Side	Face	

6-Gauge Button Bit, Drop Centre, Retractable Skirt, T38



64	6*10	3*10, 1*9	0	3	ZYA64D3-T38
64	6*11	3*10, 1*9	0	3	ZYA64D1-T38

8-Gauge Button Bit, Drop Centre, Retractable Skirt, T38




64	8*10	4*10, 1*9	0	4	ZYA64F3-T38
76	8*11	4*11, 1*9	1	4	ZYA76F3-T38
89	8*12	4*12, 2*10	0	4	ZYA89F2-T38



T38 Reamers

Pilot size is customisable for customers' requirements.

	Reaming Size (mm)	Pilot Size (mm)	Buttons * Size (mm)	LHS P/N
Reamer, One-piece, T38				

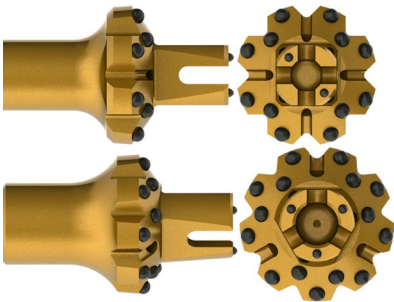

89	64	8*12, 2*10	ZQK89F/64-T38
102	64	8*14, 4*10	ZQK102F2/64-T38
127	64	14*14, 2*8	ZQK127F2/64-T38
150	64	18*14, 3*10	ZQK150G1/64-T38



T45 Shank Adaptors

	DRIFTER	LENGTH (mm)	OD (mm)	LHS P/N
Sandvik/Tamrock, T45				



HLX5PE	500	45	QW-63-4L-HK
--------	-----	----	-------------



HL650	600	52	QW-59-1L-HK
HL700			
HL710			
HL810			
HL820			

Epiroc/COP, T45				
-----------------	--	--	--	--



COP1838EX	730	60	QW-55-2L-HK
-----------	-----	----	-------------



COP1838MUX	730	52	QW-119-1L-HK
------------	-----	----	--------------



T45 Rods & Tubes

	LENGTH (mm)	OD (mm)	LHS P/N
Speed Rod, Round, T45 Female – T45 Male			
	1525	38	KYGT45-15L
	1830	38	KYGT45-18L
Guide Tube, T45 Female – T45 Male			
	1830	65	KYG65T45-18L
Guide Tube, Retractable, T45 Female – T45 Male			
	1830	65	KYG65T45Y-18L
Guide Tube, Crossover, T45 Female – T51 Male			
	1830	76	KYG76T45F/T51-18L




T45 Button Bits

Drill bits are available in spherical, ballistic and semi-ballistic carbide shapes.


	Size (mm)	Buttons * Size (mm)		Flushing		LHS P/N
		Gauge	Face	Side	Face	

8-Gauge Button Bit, Flat Face, Regular Skirt, T45



64	8*10	4*10	1	2	ZQ64F-T45
76	8*12	4*12	0	2	ZQ76F14-T45
89	8*14	6*12	2	2	ZQ89F2-T45
89	8*12	6*12	2	2	ZQ89F4-T45
102	8*14	7*12	2	2	ZQ102F1-T45
115	8*14	8*12	0	2	ZQ115F1-T45

8-Gauge Button Bit, Drop Centre, Regular Skirt, T45

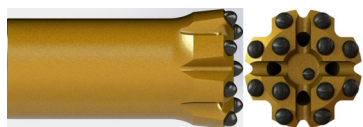

70	8*11	4*10, 1*8	0	4	ZQA70F2-T45
76	8*12	4*11, 1*10	0	4	ZQA76F5-T45
89	8*13	4*12, 1*12	0	4	ZQA89F3-T45

8-Gauge Button Bit, Flat Face, Retractor Skirt, T45



76	8*10	4*10	2	2	ZQY76F9-T45
89	8*14	6*12	0	2	ZQY89F4-T45

8-Gauge Button Bits Drop Centre, Retractor Skirt, T45




70	8*10	4*10, 1*9	1	4	ZYA70F-T45
76	8*11	4*11, 1*9	1	4	ZYA76F11-T45
76	8*12	4*11, 1*9	1	4	ZYA76F14-T45
89	8*12	4*12, 2*10	0	4	ZYA89F11-T45
102	8*14	4*12, 3*11	0	4	ZYA102F6-T45



T45 Reamers

Pilot size is customisable for customers' requirements.

	Reaming Size (mm)	Pilot Size (mm)	Buttons * Size (mm)	LHS P/N
Reamer, One-piece, T45				

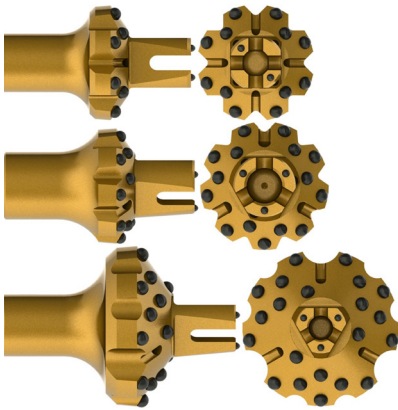

102	64	8*14, 6*10	ZQK102F/64-T45
127	76	12*14, 2*9	ZQK127F2/67-T45
150	76	15*14, 3*9	ZQK150G3/76-T45
178	76	21*16, 3*9	ZQK178G/76-T45
203	76	21*16, 3*8	ZQK203G1/76-T45
203	140	15*16	ZQK203G/140-T45





T51 Shank Adaptors

	DRIFTER	LENGTH (mm)	OD (mm)	LHS P/N
Sandvik/Tamrock, T51				
	HL650	600	52	QW-59-2L-HK
	HL700			
	HL710			
	HL810			
	HL820			
	RD900	670	52	QW173-670T51-HK
Epiroc/COP, T51				
	COP1838MUX	730	52	QW119-730T51-HK



T51 Rods & Tubes

	LENGTH (mm)	OD (mm)	LHS P/N
Speed Rod, Round, T51 Female – T51 Male			
	1525	38	KYGT51-15L
	1830	38	KYGT51-18L
Guide Tube, T51 Female – T51 Male			
	1830	76	KYG76T51-18L
Guide Tube, Crossover, T51 Female – T45 Male			
	1830	70	KYG70T51F/T45-18L




T51 Button Bits

Drill bits are available in spherical, ballistic and semi-ballistic carbide shapes.


	Size (mm)	Buttons * Size (mm)		Flushing		LHS P/N
		Gauge	Face	Side	Face	

8-Gauge Button Bit, Flat Face, Regular Skirt, T51



89	8*12	6*12	2	2	ZQ89F5-T51
89	8*14	6*12	0	2	ZQ89F8-T51
102	8*14	6*14	0	2	ZQ102F1-T51
102	8*16	6*14	0	2	ZQ102F3-T51
115	8*16	6*14	0	2	ZQ115F6-T51

8-Gauge Button Bit, Flat Face, Regular Skirt, T51

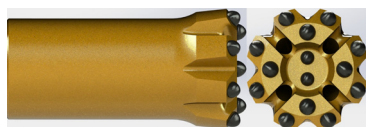


89	8*12	4*12, 2*10	0	4	ZQA89F2-T51
102	8*14	4*12, 3*11	0	4	ZQA102F-T51
115	8*14	4*14, 2*12	0	4	ZQA115F5-T51

8-Gauge Button Bit, Flat Face, Retractable Skirt, T51



115	8*14	7*14	0	2	ZQY115F3-T51
-----	------	------	---	---	--------------

9-Gauge Button Bit, Flat Face, Retractable Skirt, T51

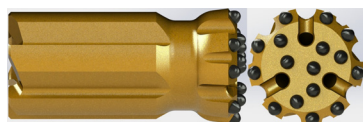

89	9*11	7*11	0	3	ZQY89G2-T51
102	9*12	7*12	0	3	ZQY102G3-T51

8-Gauge Button Bit, Drop Centre, Retractable Skirt, T51




89	8*12	4*11, 2*11	0	4	ZYA89F11-T51
102	8*14	4*12, 3*11	0	4	ZYA102F10-T51
115	8*14	4*14, 3*12	0	4	ZYA115F3-T51



T51 Reamers

Pilot size is customisable for customers' requirements.

	Reaming Size (mm)	Pilot Size (mm)	Buttons * Size (mm)	LHS P/N
Reamer, One-piece, T51				

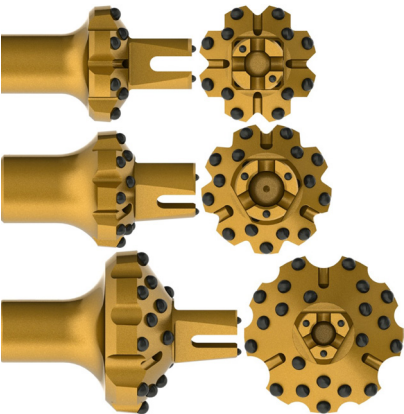

127	89	12*14, 3*9	ZQK127F/89-T51
152	76	15*14, 3*9	ZQK152G/76-T51
152	89	15*16, 3*9	ZQK152G1/89-T51
203	89	21*16, 3*9	ZQK203G/89-T51
203	152	15*16, 3*10	ZQK203G/152-T51



Auxiliary Tools

	Thread	Length (mm)	OD (mm)	LHS P/N
Bit Adaptor, T38 Female				



R32	250	56	LT38/R32M-250
T35	220	56	LT38/T35M-220
T45	230	56	LT38/T45M-230
T51	280	58	LT38/T51M-280

Bit Adaptor, T45 Female				
-------------------------	--	--	--	--



T38	220	65	LT45/T38M-220
T51	285	68	LT45/T51M-285

Bit Adaptor, T51 Female				
-------------------------	--	--	--	--



T45	225	69	LT51/T45M-225
ST58	280	76	LT51/ST58M-280
ST68	310	87	LT51/ST68-310



Auxiliary Tools

	Thread	Length (mm)	OD (mm)	LHS P/N
Fishing Tool, Pike, Standard				



T38	180	60	PFT-T38
T45	205	63	PFT-T45
T51	230	72	PFT-T51

Fishing Tool, Pike, Long




T38	205	60	PFT-T38-L
T45	270	63	PFT-T45-2



Auxiliary Tools



	Thread	Length (mm)	OD (mm)	LHS P/N
Fishing Tool, Sleeve, Standard				




T38	175	60	BT-T38
T45	205	70	BT-T45
T51	260	76	BT-T51

Fishing Tool, Sleeve, Long				
----------------------------	--	--	--	--



T38	355	60	BT-T38L
T45	395	70	BT-T45-71
T51	445	82	BT-T51L



Contact Us

LHS Rocktools – Perth (Head Office)

Address: 10 Bell Street, Kewdale, WA, 6105

Phone: (08) 9353 3288

Email: info@lhsrta.com.au

Website: www.lhsrta.com.au

LHS Rocktools – Kalgoorlie

Address: 1-5 Kayili Road, Kalgoorlie, WA, 6430

Phone: (08) 9021 8566

LHS Rocktools – Melbourne

Address: 41 North View Drive, Sunshine West, VIC, 3020

Phone: (03) 9312 3382

LHS Rocktools – Charters Towers

Address: 28 Mt. Leyshon Road, Charters Towers, QLD, 4820

Phone: (07) 4787 8769

LHS Rocktools – Cloncurry

Address: 77 Phillips Street, Cloncurry, QLD, 4824

Phone: (07) 4742 2714



ROCKTOOLS
LHS
AUSTRALIA

LHS ROCKTOOLS (AUSTRALIA) PTY LTD

+61 8 9353 3288

info@lhsrta.com.au

www.lhsrta.com.au